

FIG.1

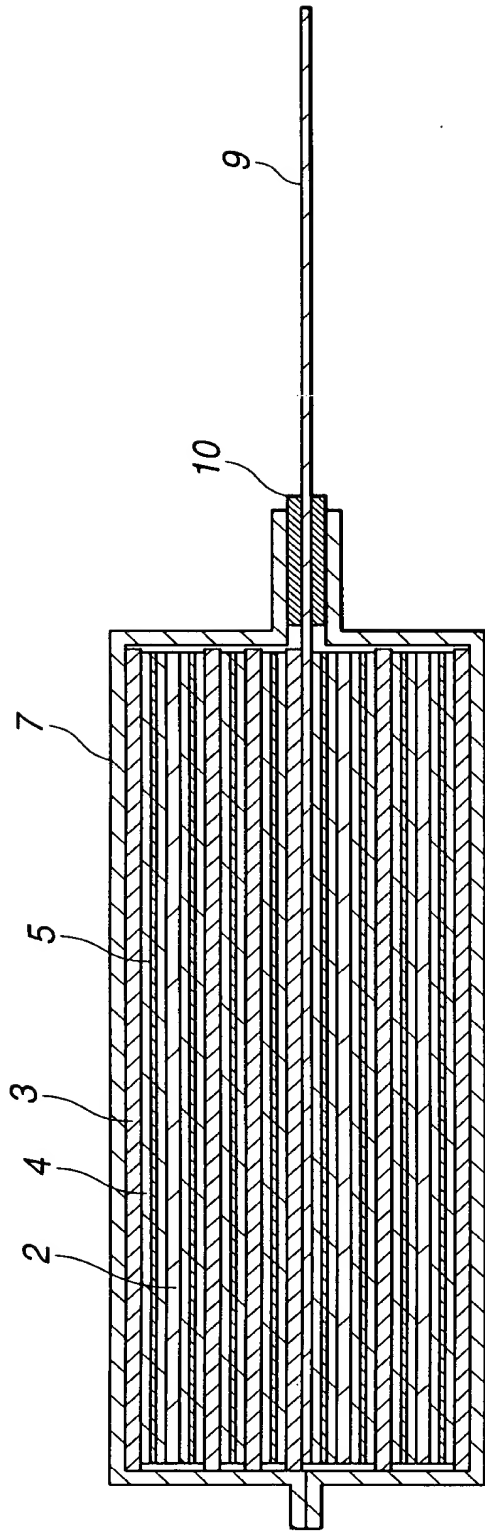


FIG.2

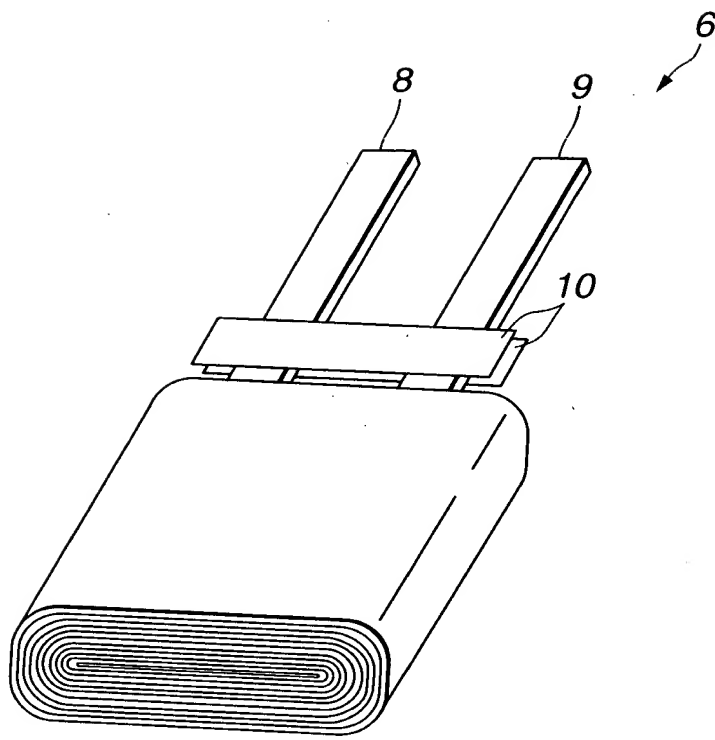


FIG.3

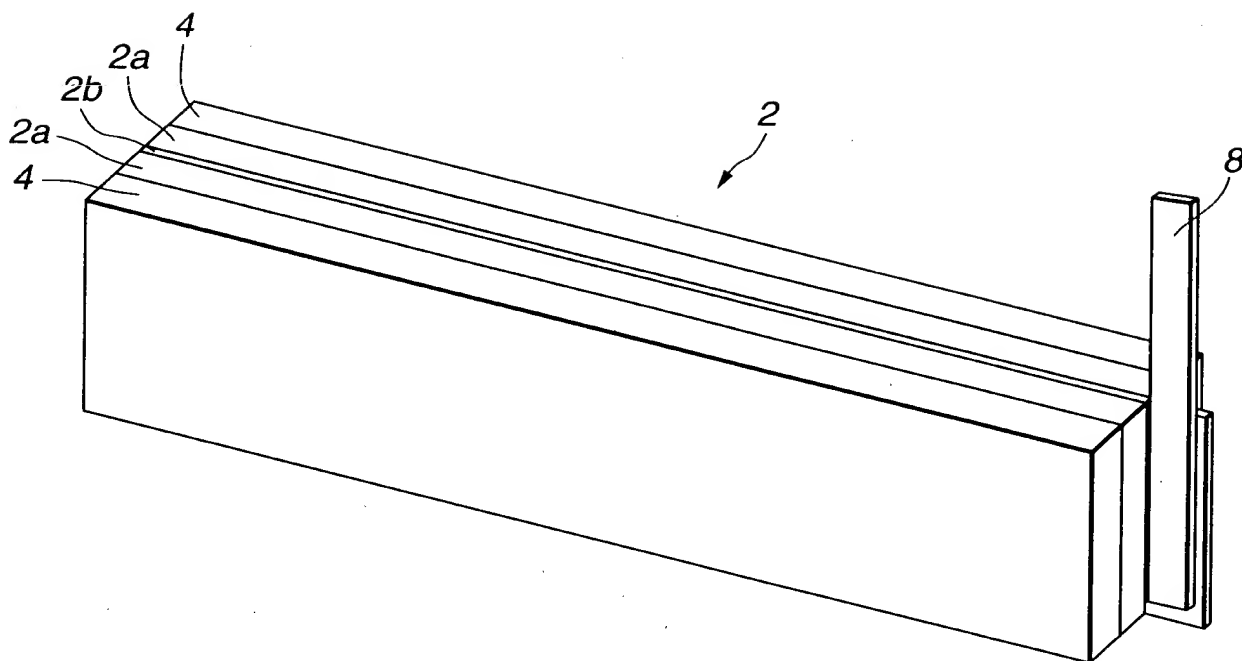


FIG.4

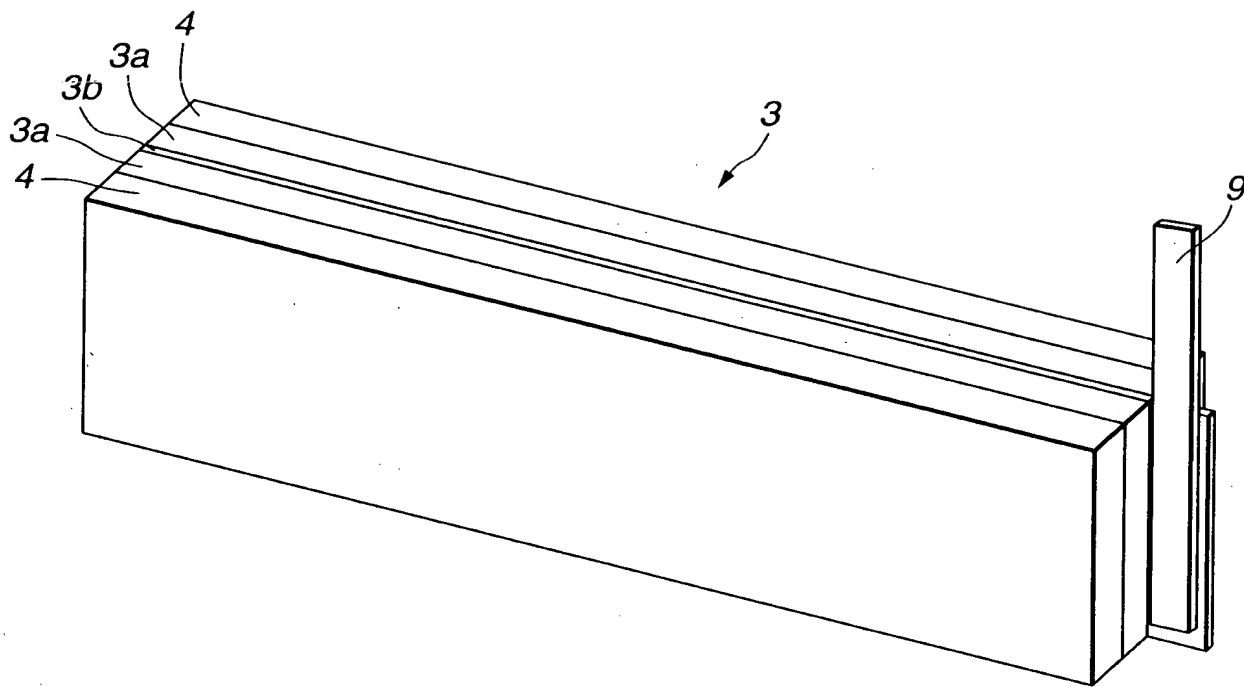


FIG.5

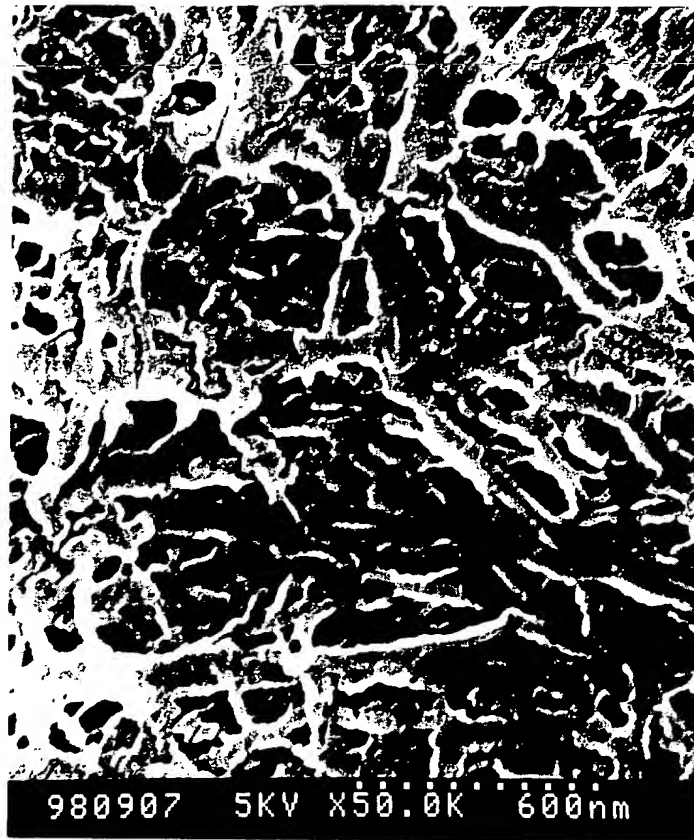


FIG.6

FIG. 7 is a cross-sectional view of the device 100 showing the device 100 in a closed position. The device 100 includes a housing 102, a piston 104, a spring 106, and a valve 108. The piston 104 is biased by the spring 106 to the closed position. The valve 108 is located at the bottom of the housing 102. The device 100 is shown in a cross-sectional view.

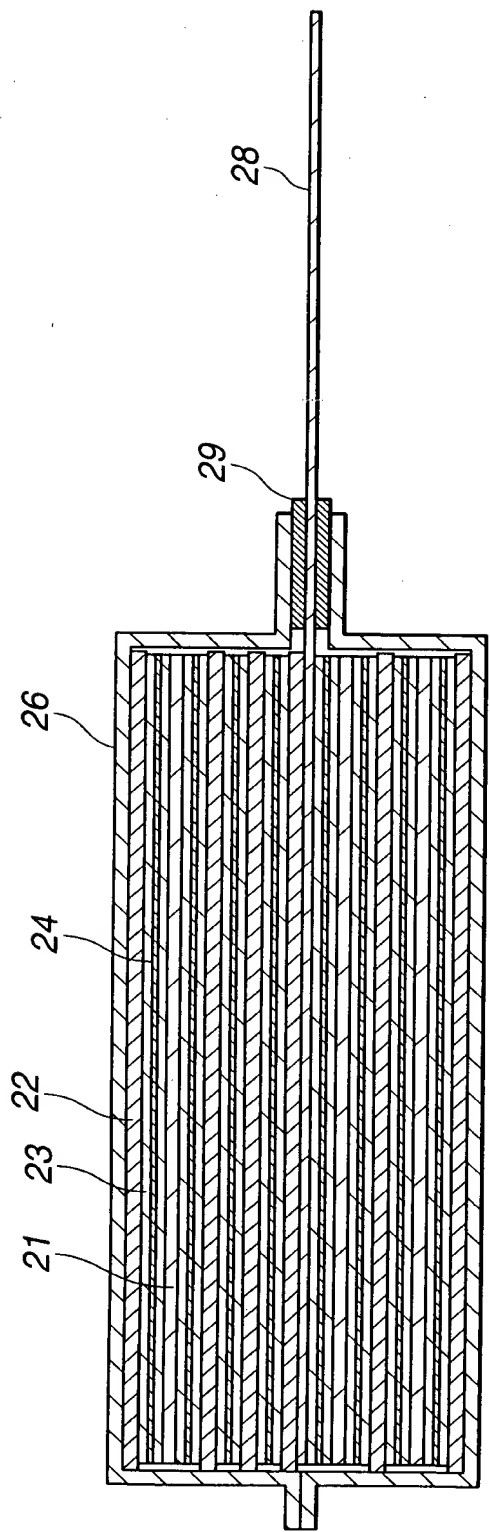


FIG.7

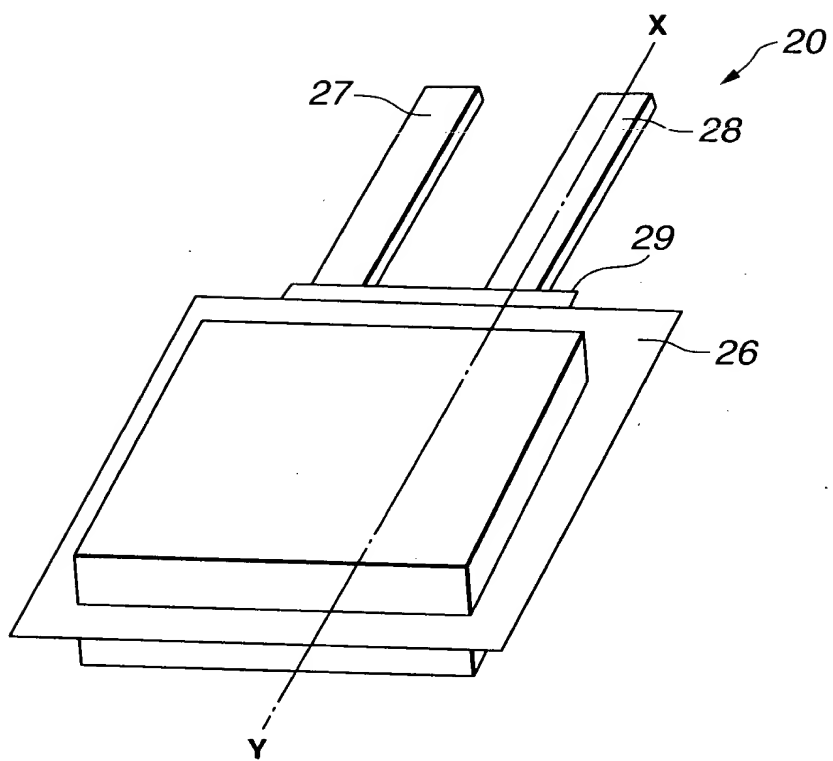


FIG.8

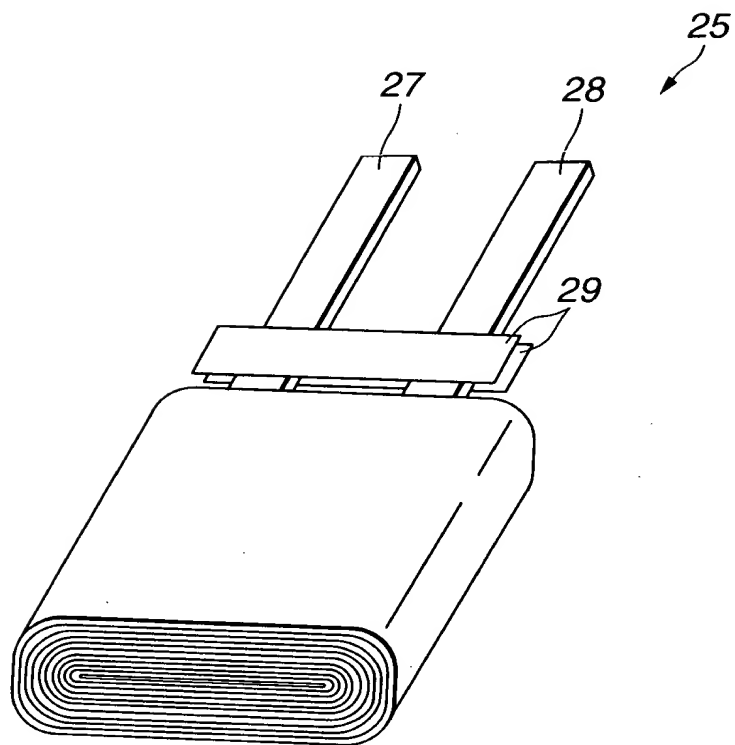


FIG.9

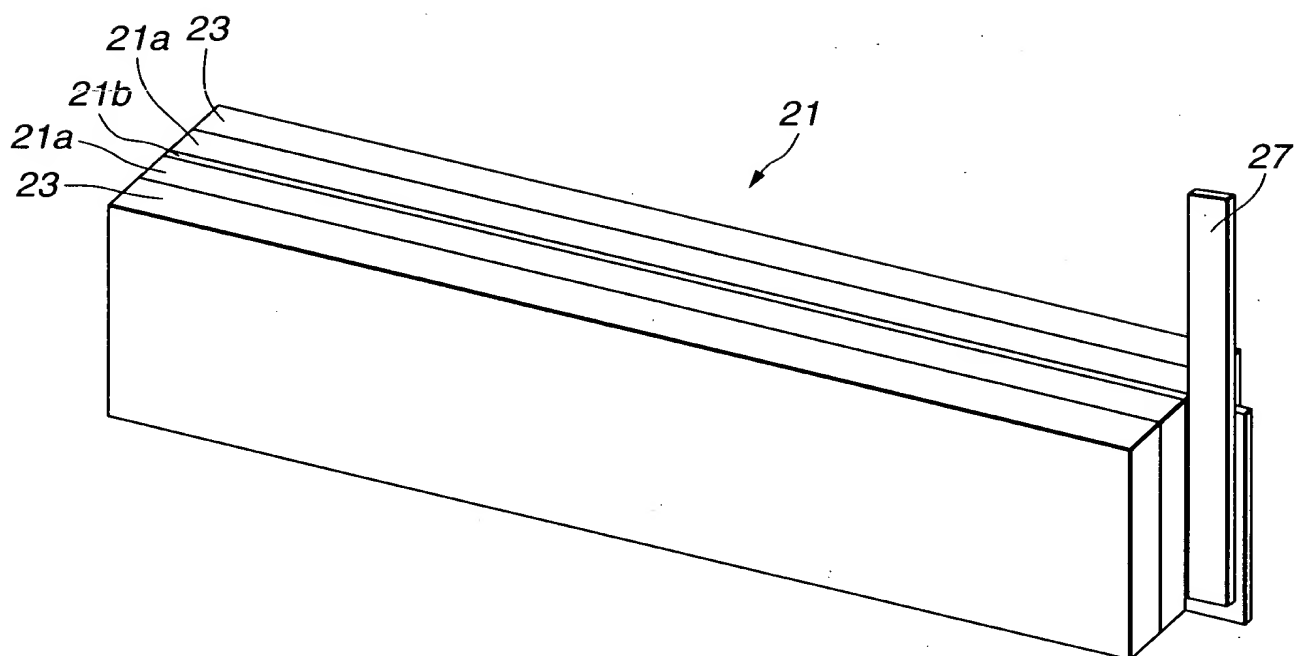


FIG.10

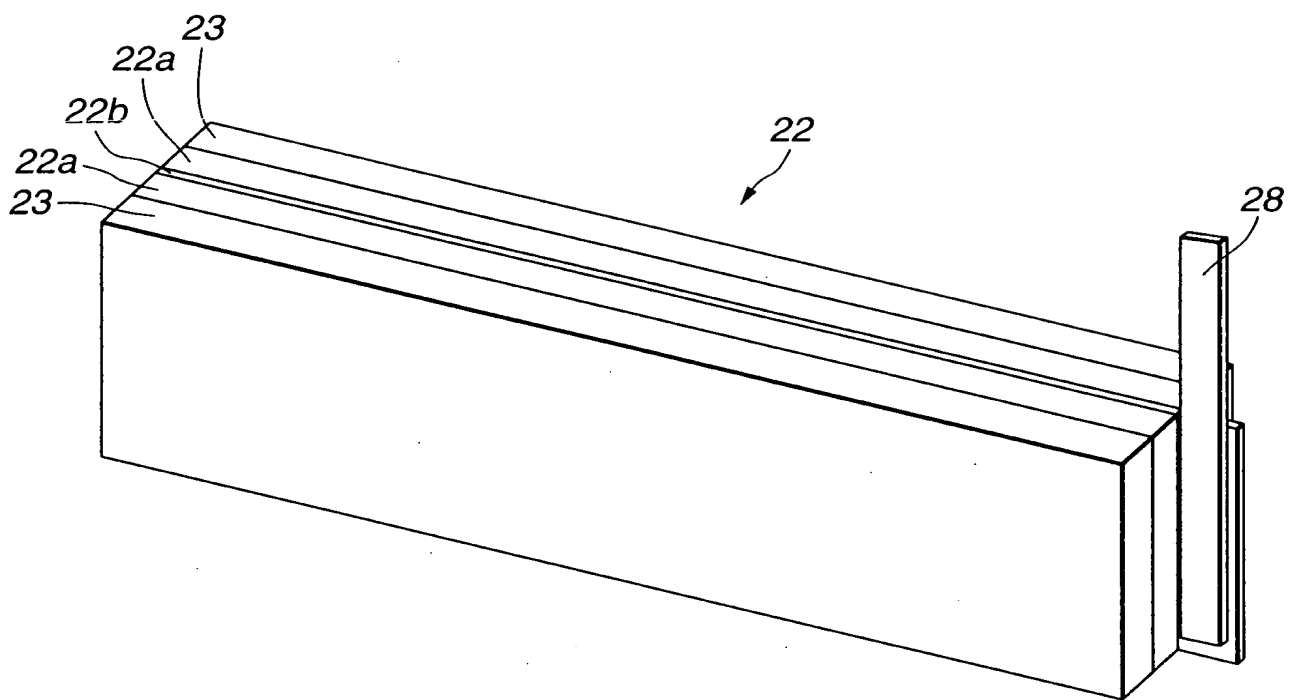


FIG.11

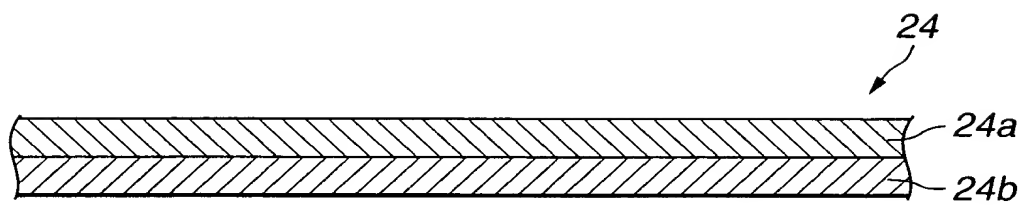


FIG.12

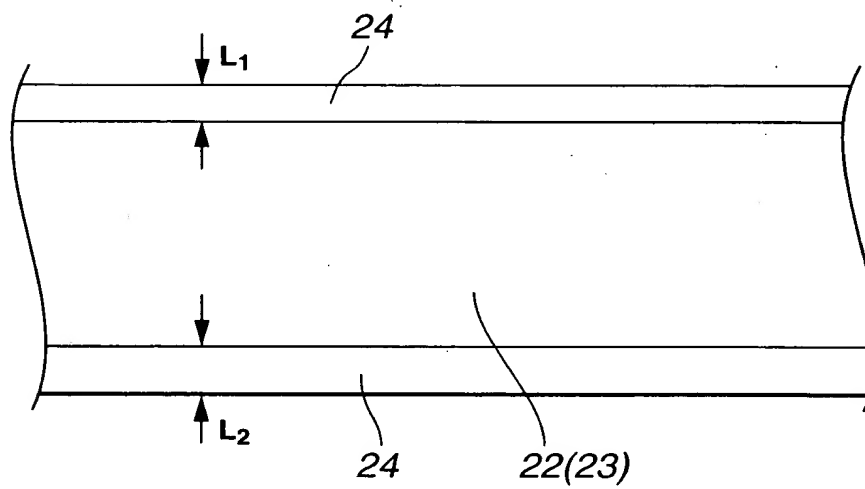


FIG.13

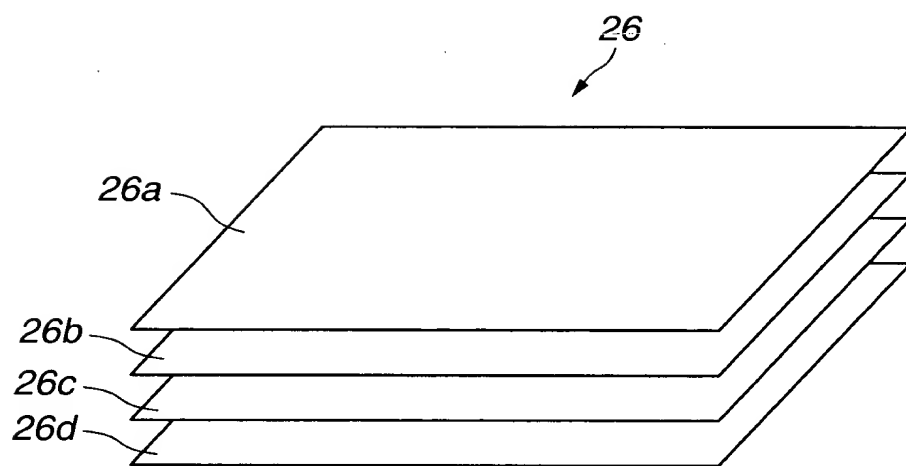


FIG.14

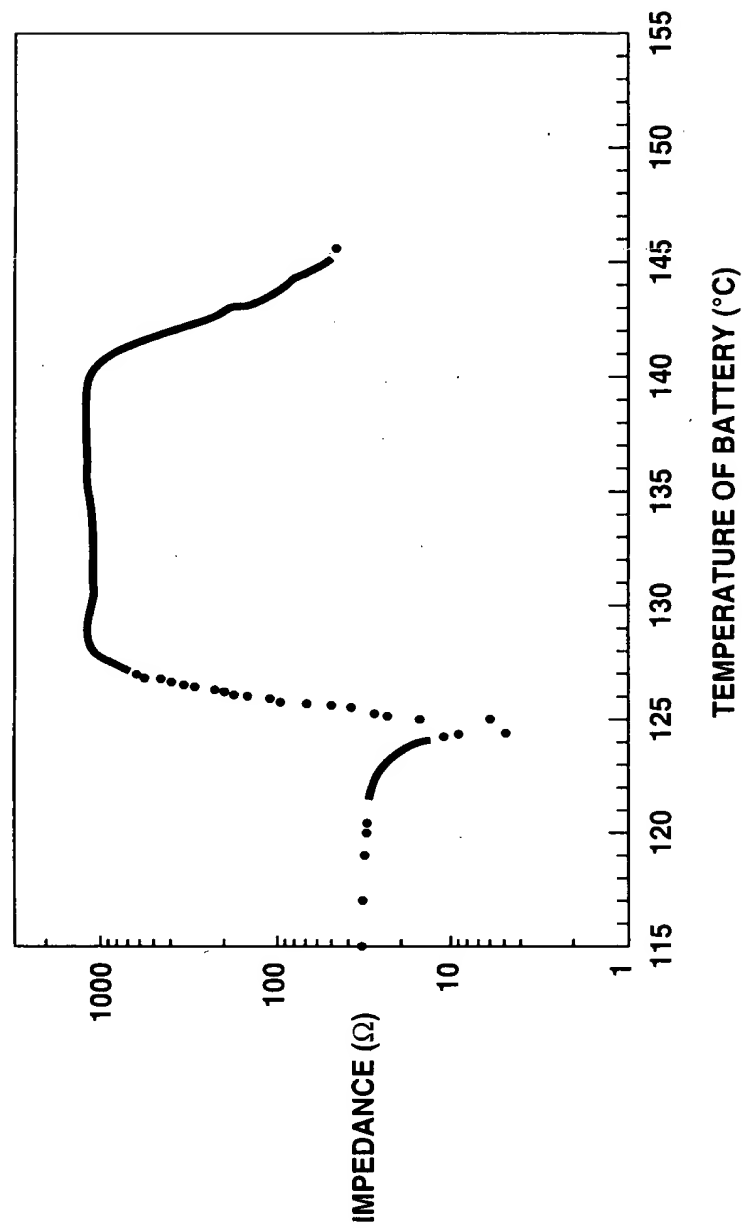


FIG.15

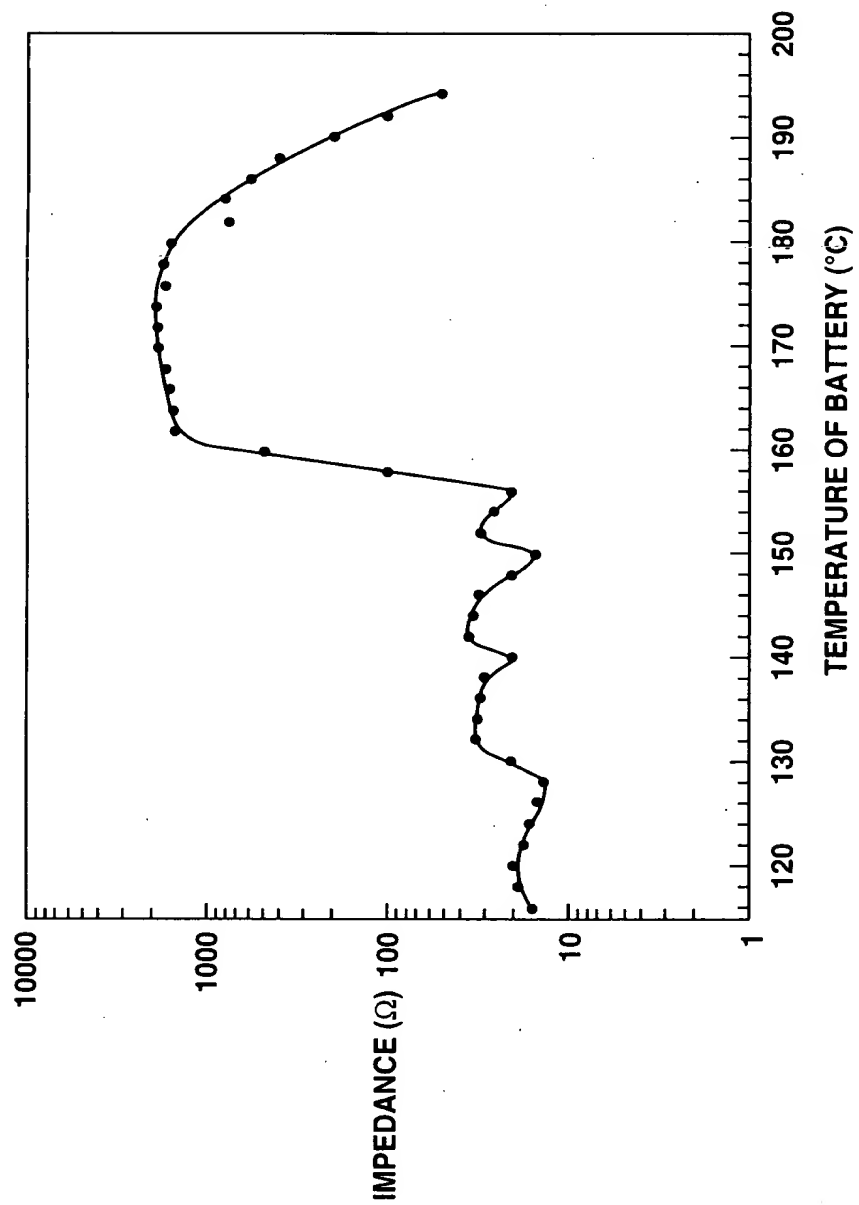


FIG.16

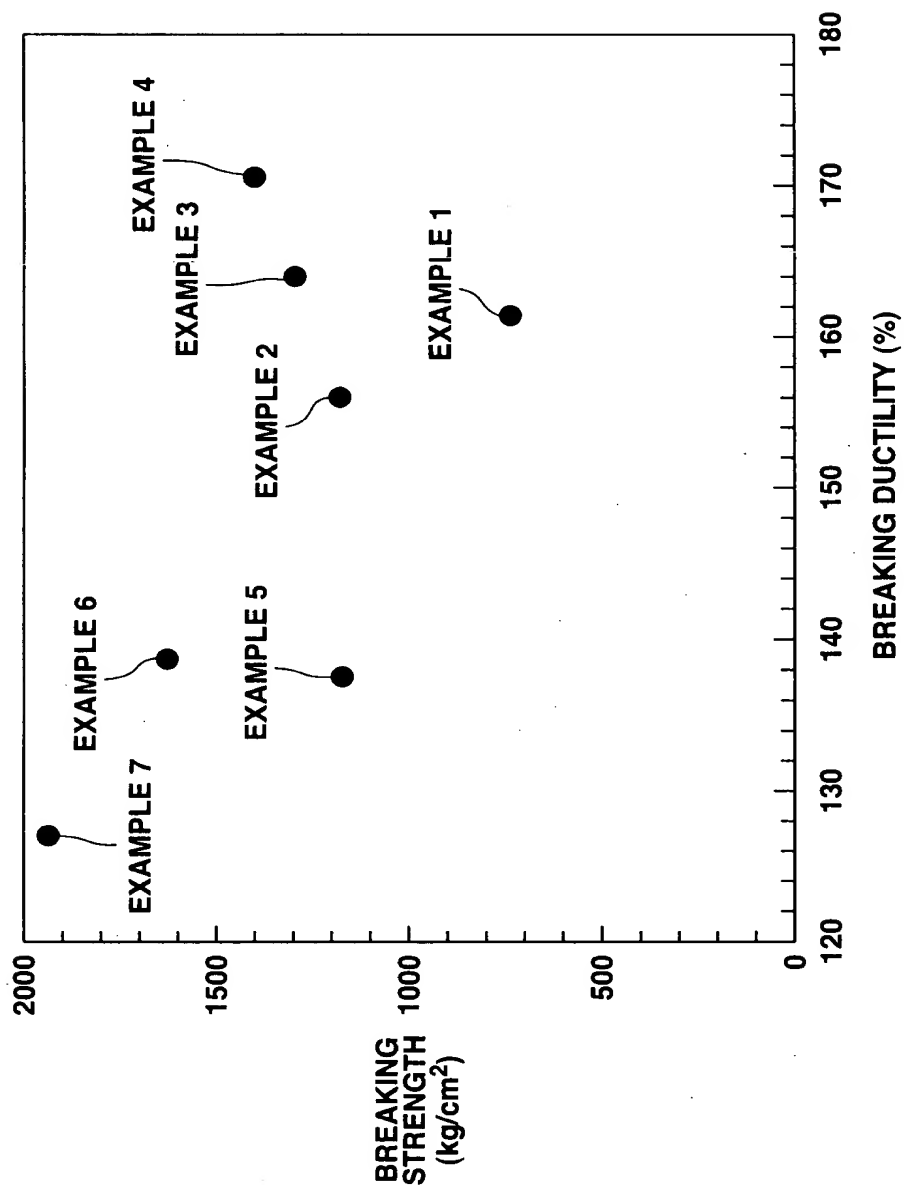


FIG.17



FIG.18